



Balun Pasivo - BALUN_DC

Características

CH Passive Video & Power Transceiver (12V/24V DC/AC)

- Color video signal up to 1300ft(400m) via UTP cat5e/6
- Transmit power signal up to 750ft(250m)
- Male BNC with extended mini-coax pigtail
- RJ45 Jack for UTP cable
- NTSC, PAL & SECAM video format compatible
- Real-time transmission
- No power required
- Exceptional interference rejection
- Built-in TVS for surge protection
- Lightning protection design Grade: III
- 50 dB crosstalk and noise immunity
- Wave Filter Design, Anti-Static Design
- Compact size and easy installation
- ABS Engineering plastic housing



BALUN_DC





Overview

The FS-4301VP video balun is a passive (non-amplified) device that allows the transmission of real-time CCTV video signal via cost-effective Unshielded Twisted Paired(UTP) cable. Baseband (composite) signals of any type are support Used in pairs, FS-4301VP eliminates costly and bulky coaxial cable, allowing live CCTV color video signal up to 1300ft 400m),power transmission up to 750ft(250m). FS-4301VP is also compatible with all the other FOLKSAFE passive transceiver for application at distance up to 1300ft (400m) and active receiver up to 2200ft(700m).

The superial interference rejection and low emissions of the FS-4301VP allow video signals to coexist in the same wire bundle as telephone, datacom, or low-voltage power circuits. This allows the use of a shared or existing cable plant. FS-4301VP has built-in surge suppression to protect video equipment against damaging voltage spikes. Its crosstalk and noise immunity ensure quality video signals.

Aplicaciones



- Security Monitoring System
- Multimedia Network Teaching System
- Medical Monitoring Display System
- Industrial Automation Control System
- Banking, securities, financial information display system
- Remote Network Server Monitoring
- Department Store Security
- Casino Security
- Hospitals, Airports and banks
- School Campuses






Recomendaciones

FS-4301VP is recommended to use with Unshielded Twisted Paired (UTP) wiring from 24AWG through 22AW G.. Individually shielded pairs should be avoided, as they reduce the operating range of the systems drastically. Multi-pair cable (25-pair or more) with an overall shield are acceptable. Video signals can coexist in the same wire bundle as telephone, datacom, or low-voltages power circuits. While video may be routed through telephone punch-down block terminals, any bridge-taps, also called T-taps and any resistive, capacitive or inductive devices MUST BE removed from the pair.

For more specific information regarding wire types, gauges and proper installation techniques, please contact us for technical assistance.

Caída del voltaje de acuerdo a la tirada del cable



Distancia	Desired/Voltage - Starting/Voltage		
	DC 12V 0,5A	DC 12V 1A	DC 12V 1,5A
50m/160ft	13,5V	15,5V	17,0V
100m/320ft	15,5V	18,5V	22,0V
150m/500ft	17,0V	22,0V	27,0V
200m/650ft	18,5V	25,5V	32,0V
300m/1000ft	22,0V	32,0V	42,0V





Especificaciones técnicas

Modelo	BALUN DC	
Product Name	Single Channel Passive Video and Power Transceiver	
Applied Devices	CCTV cameras, monitors, DVR, switchers, IP encoders, and other CCTV equipment	
Video	Video Format	PAL, NTSC, SECAM
	Operating Frequency	DC to 5MHz
	Max Distance	UTP Category 5e (24AWG) Color: 1300ft(400m) B & W: 1950ft(600m)
	Common-mode/Differential-mode rejection	15 KHz to 5 MHz 60 dB typ
	Impedance	Coax, Male BNC 75 ohms UTP,RJ45 100 ohms
Wire Type	Attenuation	0.5 dB typ
	Network Wiring	One Unshielded Twisted Pair (for each video signal) 24-16 AWG (0.5-1.31mm)
	Category Type	2 or better
	Impedance	100 ± 20 ohms
	DC Loop Resistance	52 ohms per 1,000ft (18 ohms per 100m)
Power	Differential Capacitance	19 pF/ft max (62 pF/m max)
	Power Input	No external power required
Connector	Power trasmission	12V/24V,DC/AC, up to 750ft(250m) via UTP cat5e/6
	Video Input/Output	Male BNC connector
Protection	Video Input/Output	RJ45 Jack
	Surge Protection	Built-in Transient Voltage Suppressor(TVS)
Mechanical	Antistatic	Yes
	Dimensions(L*W*H)	65*36*25mm (BNC connector & cable excluded)
	Housing	ABS engineering plastic
	Body Color	Black
Environmental	Net Weight	60g
	Operating Temperature	-25° ~ 75° C
	Relative Humidity	0~95% (non-condensing)
	Storage Temperature	-40° ~ 150° C



Diagrama de conexiones

Diagram 1

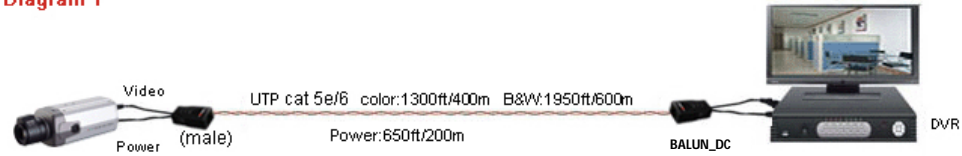


Diagram 2

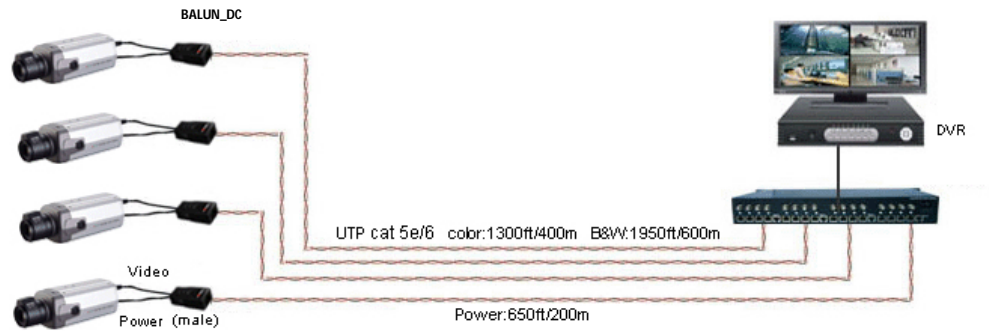


Diagram 3

